

Contec

Tuch Amplitude Optic Wipe #C6-99

pure¹¹-Nr.: 1106077, Marke: Contec

Eigenschaften

- Marke: Contec
- Flächengewicht in g/m²: 17 g/m²
- Anzahl Lagen: 1
- Struktur: Vliesstoff
- Material: Zellulose
- Lieferform in Verpackung: gelegt
- Verpackungsform: Beutel
- Anzahl in kleinster Unterverpackung: 500
- Besonders reißfest
- Chemikalienbeständigkeit
- Gebrauch: Einweg
- Zellulose: 100 %
- Flächengewicht in g/m²: 17 g/m²

Empfohlene

Reinraumklassen

ISO 5|6|7|8|9

GMP C|D

Material

- Zellulose

Verpackung

- 500STK

Produktvarianten

pure¹¹-Nr.: 1106077, Tuch Amplitude Optic Wipe #C6-99


Größe: 23 x 23 cm (9 x 9"); Farbe: Weiß / VE: 500STK

Amplitude™ Optic Wipes

Optical grade cellulose nonwoven wipes

Amplitude™ Optic wipes are 100% nonwoven cellulose. The wipe consists of long staple fibers which are wet laid in a paper making process to form an extremely clean sheet. It features very low levels of extractables and only moderate particle generation. The wipe has a nonabrasive surface texture. The wipes are both absorbent and optical grade.

These nonwoven wipes were specifically designed for the delicate cleaning of optical products and microminiature electronic components. It can also be used as a lining for cleanroom surfaces and trays.

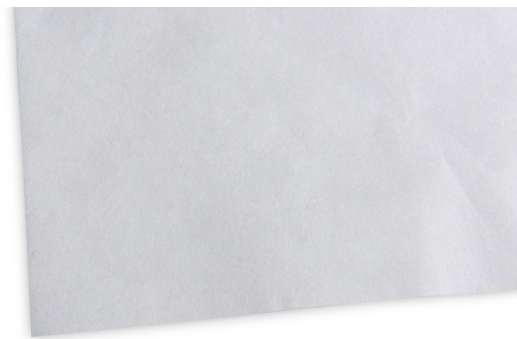

Features	Benefits
100% nonwoven cellulose	• Very low levels of extractables • Long staple fibers create a nonabrasive wipe and allows for excellent sorbency
Moderate particle generation	• Ideal for use in controlled environments • Specifically designed for the delicate cleaning of optical products and microminiature electronic components

Part No.	Description	Size	Packaging
C6-99	Amplitude Optic Wipes, Flat stacked	9" x 9" (230 x 230 mm)	500/bag; 25 bags/case
C6-1212	Amplitude Optic Wipes, Flat stacked	12" x 12" (305 x 305 mm)	500/bag; 20 bags/case

Product Information

Material	• 100% cellulose
Construction	• Nonwoven
Packaging materials	• Outer bags (OB1, OB2), low density polyethylene (LDPE)  Case (CS), corrugated fiberboard (PAP) 
Environment	• ISO 6-8 Grade C/D



Technical Data

Attribute (units)	Typical Value	Test Method
Basis weight, nominal; (g/m ²)	16.6	Contec Method
Sorbent capacity; (mL/m ²)	79.2	IEST-RP-CC004.2, Sec. 7.1
Sorptive rate; (seconds)	1	
Non-volatile residue, NVR		IEST-RP-CC004.3, Sec. 6.1.2
In deionized water; (g/m ²)	0.0238	
In isopropyl alcohol; (g/m ²)	0.0110	
Specific ions		IEST-RP-CC004.2, Sec. 6.2.2
Sodium; (ppm)	199.83	
Chloride; (ppm)	0	
Particles, readily releasable		IEST-RP-CC004.2, Sec. 5.2
Particles $\geq 0.5\mu\text{m}$; ($\times 10^6/\text{m}^2$)	42.42	
Fibers $\geq 100\mu\text{m}$; ($\times 10^3/\text{m}^2$)	0.517	

Recycle Symbols

PET	
HDPE	
LDPE	
PP	
PAP	

Packaging	EA/OB1	OB1/OB2	OB2/CS	EA/CS
C6-99	50	1	12	12,500
C6-1212	500	1	20	10,000

EA = each; OB = outer bag; CS = case

Notes

- a) The data shown are typical values and should not be used as product specifications.
b) Valid product comparisons may only be obtained through side-by-side testing in the same test facility, under similar conditions.
c) Current and/or comparison data may be available. Please contact a Contec sales representative for details.
d) All of Contec's packaging is compatible with hydrogen peroxide gassing applications.
e) These wipes are free of lint and loose fibers, and meet the definition of lint-free/low linting wipes according to the United States Pharmacopoeia Chapter 797 (USP-NF General Chapter <797> Pharmaceutical Compounding -Sterile Preparations) and the Institute of Environmental Sciences and Technology Recommended Practice IEST-RP-CC004.4

Test Methods:

1. CTM = Contec Test Method
2. IEST-RP-CC004.3 = Evaluating Wiping Materials Used in Cleanroom and Other Controlled Environments, Institute of environmental Sciences and Technology, Rolling Meadows IL.

PDSW025 | 090822 | ETR1365

Copyright © 2022 Contec, Inc. All rights reserved.