


TexWipe

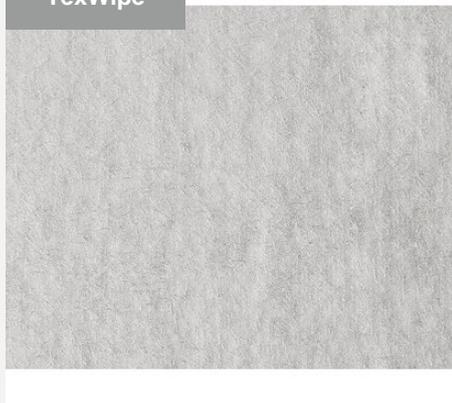

Tuch Sterile TechniSat #TX3217

pure¹¹-Nr.: 1106204, Marke: TexWipe

Eigenschaften

- Steril
- Marke: TexWipe
- Anzahl Lagen: 1
- Struktur: Vliesstoff
- Material: Polyester/Zellulose
- Lieferform in Verpackung: gefaltet
- Verpackungsform: Flachpackung (FlowPack)
- Anzahl in kleinster Unterverpackung: 20
- Filtriert auf 0,2µm
- Gebrauch: Einweg
- Hydroverfestigt
- Polyester/PES: 45 %
- Sterilisation validiert
- Zellulose: 55 %

Empfohlene

Reinraumklassen

ISO 5|6|7|8|9

GMP A/B|C|D



Material

- Polyester/Zellulose

Verpackung

- 480STK

Produktvarianten

pure¹¹-Nr.: 1106204, Tuch Sterile TechniSat #TX3217


Steril; Größe: 23 x 23 cm (9 x 9"); Farbe: Weiß / VE: 480STK



Texwipe.com

Technicloth[®]

Dry | Pre-Wetted | Sterile

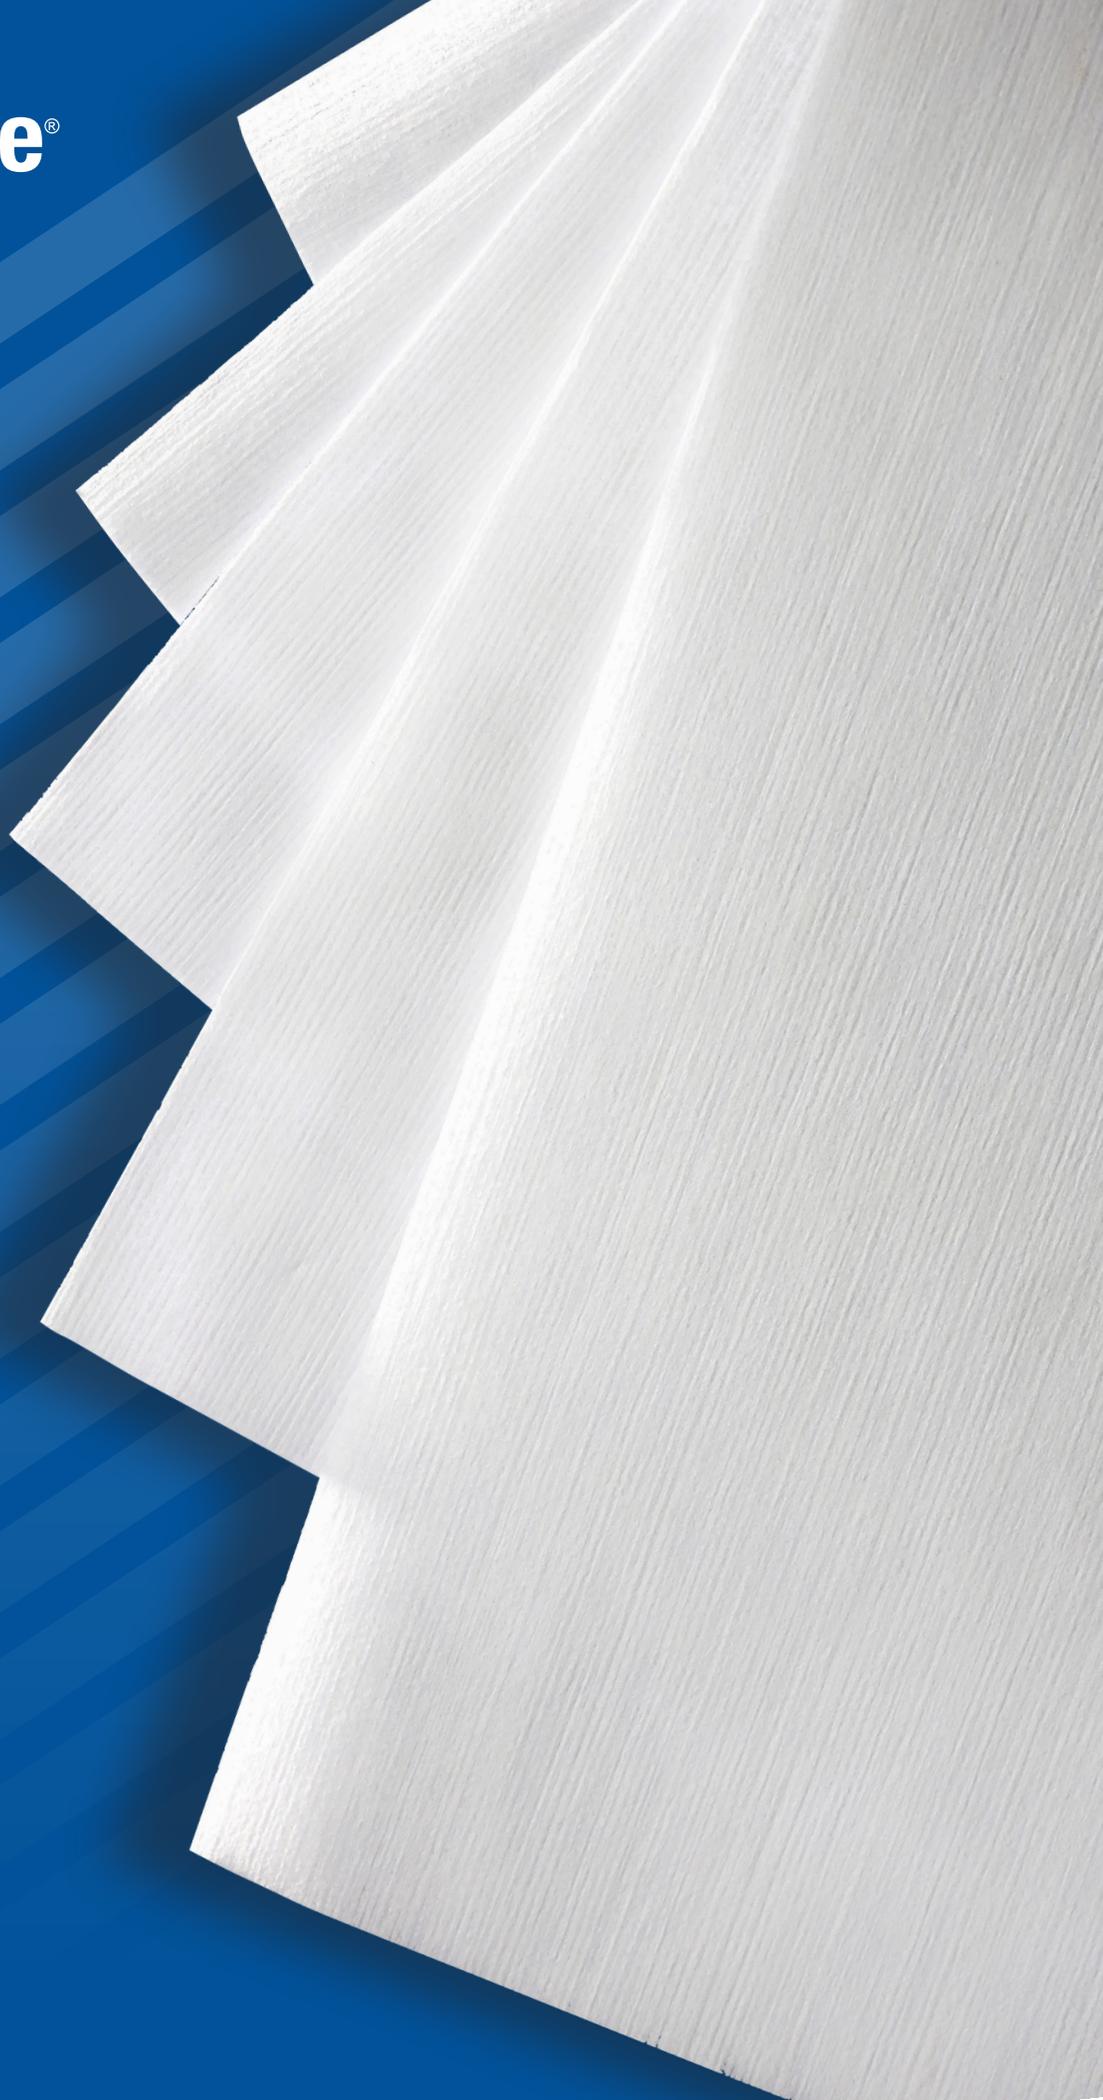

TECHNICAL DATA SHEET


 TechniCloth®
 45% Polyester / 55% Cellulose


Products

| Number | Description | Sterile | Packaging | Case |
|---------------------------------------|---|---------|--|-------------------------|
| <i>Dry Wipers – TechniCloth®</i> | | | | |
| TX604 | 4" x 4" (10 cm x 10 cm) dry | | 1,200 wipers/bag (4 packs of 300 wipers) | 10 bags |
| TX606 | 6" x 6" (15 cm x 15 cm) dry | | 600 wipers/bag (2 packs of 300 wipers) | 10 bags |
| TX609 | 9" x 9" (23 cm x 23 cm) dry | | 300 wipers/bag | 10 bags |
| STX609 | 9" x 9" (23 cm x 23 cm) dry, sterile | ● | 100 wiper/bag (4 packs of 25 wipers) | 5 bags |
| TX612 | 12" x 12" (31 cm x 31 cm) dry | | 150 wipers/bag | 10 bags |
| TX3210 | 12" x 12" (31 cm x 31 cm) dry, SteriWipe™ HS II | ● | 100 wipers/bag (5 packs of 20 wipers) | 5 bags |
| <i>Pre-Wetted Wipers – TechniSat®</i> | | | | |
| TX1045 | 6" x 8" (15 cm x 20 cm) pre-wetted with 70% IPA | | 100 wipers/reclosable bag | 12 bags |
| TX1067 | 7" x 11" (18 cm x 28 cm) pre-wetted with 70% IPA | | 200 wipers/reclosable bag | 4 bags |
| TX1048 | 8" x 5" (20 cm x 13 cm) pre-wetted with 6% IPA | | 210 wipers/refill pack | 12 refill packs & 1 tub |
| TX1041 | 9" x 11" (23 cm x 28 cm) pre-wetted with 70% IPA | | 70 wipers/reclosable bag | 12 bags |
| TX1065 | 9" x 11" (23 cm x 28 cm) pre-wetted with 70% IPA | | 50 wipers/flexpack | 20 flexpacks |
| TX3214 | 9" x 11" (23 cm x 28 cm) pre-wetted with 70% IPA, sterile | ● | 50 wipers/flexpack | 20 flexpacks |
| TX3217 | 9" x 11" (23 cm x 28 cm) pre-wetted with 70% IPA, sterile | ● | 20 wipers/flexpack | 24 flexpacks |
| TX8488 | 9" x 11" (23 cm x 28 cm) pre-wetted with 6% IPA | | 300 wipers/reclosable bag | 3 bags |

T E C H N I C A L D A T A S H E E T

Description

TechniCloth[®] is made from 45% polyester / 55% cellulose nonwoven material with a cut edge, cleanroom manufactured.

Available dry (TechniCloth[®]), pre-wetted (TechniSat[®]) and sterile.

Applications

- Wiping and cleaning surfaces, equipment and parts
- Spill control
- Applying and removing lubricants, adhesives, residues and other solutions including disinfectants
- Cleaning with solvents such as isopropyl alcohol (IPA), ethanol, acetone, and degreasers
- Cleaning gloves, notebooks, phones or any other item entering the cleanroom
- Lining trays for holding, protecting, drying and storing of parts, equipment and devices

Industries

| | | |
|------------------------|------------------------|--------------------------|
| Aerospace | Animal Laboratory | Biologics |
| Cleanroom Design/Build | Compounding Pharmacies | Data Storage |
| Facilities Maintenance | Industrial | Laboratory |
| Medical Device | Microelectronics | Pharmaceutical |
| Printing/Graphics | Semiconductor | USP <797> / USP <800> |

Features & Benefits

- Constructed from 45% polyester / 55% cellulose nonwoven creating a durable wiper ideal for spill control, cleaning, and solution application
- Manufactured to provide low levels of particles and extractables, creating a wiper suitable for general cleaning and wiping
- Excellent chemical resistance for compatibility with a variety of solutions
- Autoclave safe (dry wipers only)
- TechniSat[®] products are prewet with 0.2 µm filtered 70% IPA / 30% DIW, or 6% IPA/ 94% DIW for ease of use
- TechniSat[®] wipers provide consistent, optimized cleaning efficiency with repeatable wetness and VOC levels
- TechniSat[®] wipers are packaged in easy-to-use, reclosable slider bags, tubs, and peel-and-reseal bags, reducing solution evaporation that preserves the consistent wiper wetness level
- Meets USP <797> and USP <800> wiper requirements
- Individually lot coded for ease of traceability and quality control

Cleanroom Environment

- ISO Class 5 – 8
- Class 100 – 100,000
- EU Grade B – D

Shelf Life

- Non-Sterile (Dry) – 5 years from date of manufacture
- Non-Sterile (Pre-Wetted) – 3 years from date of manufacture
- TX8488 – 1 year from date of manufacture
- Sterile (Dry & Pre-Wetted) – 3 years from date of manufacture

TECHNICAL DATA SHEET

Performance Characteristics

| Property | Typical Value | Test Method* |
|-----------------------------|---|--------------|
| Particles and Fibers | | |
| LPC: 0.5 µm | 72 x 10 ⁶ particles/m ² | 1, TM22 |
| Fibers: >100 µm | 55,000 fibers/m ² | 2, TM22 |
| Nonvolatile Residue | | |
| IPA extractant | 0.01 g/m ² | 1, TM1 |
| DIW extractant | 0.03 g/m ² | 1, TM1 |
| Ethanol extractant | 0.01 g/m ² | 1, TM1 |
| Ions | | |
| Sodium | 12 ppm | 1, TM18 |
| Potassium | 1 ppm | 1, TM18 |
| Chloride | 10 ppm | 1, TM18 |

Physical Characteristics

| Property | Typical Value | Test Method* |
|---------------------|-----------------------|--------------|
| Absorbency | | |
| Sorptive capacity | 360 mL/m ² | 1, TM20 |
| Sorptive rate | <0.3 seconds | 1, TM20 |
| Basis Weight | 69 g/m ² | 1, TM20 |

Note: The data in this table represent typical analyses.

*Test Methods

- 1 – “Evaluating Wiping Materials Used in Cleanroom and Other Controlled Environments,” IEST-RP-CC004.3, Institute for Environmental Sciences and Technology, Rolling Meadows, IL, 2004; www.iest.org.
 - 2 – E2090-12(2020), “Standard Test Method for Size-Differentiated Counting of Particles and Fibers Released from Cleanroom Wipers Using Optical and Scanning Electron Microscopy,” ASTM International, West Conshohocken, PA, 2020; www.astm.org.
- TM – Refers to Texwipe Test Method – available upon request. Contact Texwipe Customer Service at Texwipe.com or info@texwipe.com for a copy.

For non-sterile products:

- TX1045, TX1048, TX8488 – filled using Semiconductor-grade IPA.
- TX1041, TX1065, TX1067 – filled using USP-grade IPA.

For sterile products:

- Gamma irradiated to a Sterility Assurance Level of 10⁻⁶ according to AAMI Guidelines.
- Certificates of Compliance, Analysis and Processing/Irradiation available for each lot.
- Sterile Validation Documentation available upon request.
- TX3214, TX3217 – filled using USP-grade IPA.

Texwipe holds an ISO 9001:2015 registration.

All Texwipe products conform to GHS classification for labeling (where applicable).

Shipping classification based on weight of inner package.



Americas

+1 336 996 7046

EMEA

+31 88 1307 410

Philippines

+63 49 543 0241

China

+86 512 6303 3700

Texwipe.com