


UltraTape

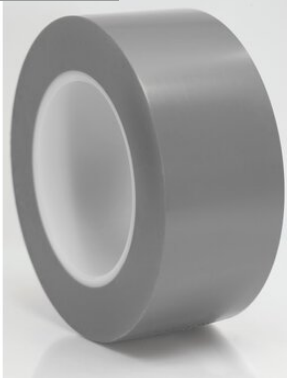

## Reinraum-Klebeband Vinyl #1160-2

pure<sup>11</sup>-Nr.: 1130052, Marke: UltraTape

### Eigenschaften

- Marke: UltraTape
- Material: Vinyl
- Breite in cm: 5,08 cm
- Beschreibbar
- Länge in m: 32,9
- Klebestärke: mittel
- Klebstoff: Gummi
- LABS frei
- PVC: 100 %
- Reinheitsgrad: Ultra Clean
- Rückstandsfrei ablösbar
- Silikonfrei

### Empfohlene

### Reinraumklassen

ISO 4|5|6|7|8|9

GMP C|D

## Material

- Vinyl

## Verpackung

- 3STK

## Produktvarianten

---

**pure<sup>11</sup>-Nr.: 1130052GY2I, Reinraum-Klebeband Vinyl #1160-2**

Farbe: Grau; Breite: 2" / VE: 3STK

---

**pure<sup>11</sup>-Nr.: 1130052BK2I, Reinraum-Klebeband Vinyl #1160-2**

Farbe: Schwarz; Breite: 2" / VE: 3STK

---

**pure<sup>11</sup>-Nr.: 1130052BL2I, Reinraum-Klebeband Vinyl #1160-2**

Farbe: Blau; Breite: 2" / VE: 3STK

---

**pure<sup>11</sup>-Nr.: 1130052BN2I, Reinraum-Klebeband Vinyl #1160-2**

Farbe: Braun; Breite: 2" / VE: 3STK

---

**pure<sup>11</sup>-Nr.: 1130052GN2I, Reinraum-Klebeband Vinyl #1160-2**

Farbe: Grün; Breite: 2" / VE: 3STK

---

**pure<sup>11</sup>-Nr.: 1130052OR2I, Reinraum-Klebeband Vinyl #1160-2**

Farbe: Orange; Breite: 2" / VE: 3STK

---

**pure<sup>11</sup>-Nr.: 1130052RD2I, Reinraum-Klebeband Vinyl #1160-2**

Farbe: Rot; Breite: 2" / VE: 3STK

---

**pure<sup>11</sup>-Nr.: 1130052TP2I, Reinraum-Klebeband Vinyl #1160-2**

Farbe: Transparent; Breite: 2" / VE: 3STK

---

**pure<sup>11</sup>-Nr.: 1130052WH2I, Reinraum-Klebeband Vinyl #1160-2**

Farbe: Weiß; Breite: 2" / VE: 3STK

---

**pure<sup>11</sup>-Nr.: 1130052YL2I, Reinraum-Klebeband Vinyl #1160-2**

Farbe: Gelb; Breite: 2" / VE: 3STK

---

## UT1160 Vinyl Medium Adhesion Cleanroom Tape

### DESCRIPTION

**UltraTape 1160 / 0160** is a general use vinyl tape. The medium adhesion provides a strong bond and easy release making it perfect for maintenance and construction uses.

- Chemical resistant, durable backing
- Bright durable colors for floor and tool marking
- Low residue
- Easy to write on with a pen

### PROPERTIES

|                                    |                                                                                      |
|------------------------------------|--------------------------------------------------------------------------------------|
| Backing                            | Polyvinyl Chloride                                                                   |
| Adhesive                           | Rubber                                                                               |
| Total Thickness                    | 5.0 mils (0.125 mm)                                                                  |
| Tensile Strength                   | 208 oz/in. (22.8 N/cm)                                                               |
| Adhesion to Stainless Steel        | 18 oz/in (21 N/cm)                                                                   |
| Elongation                         | 180%                                                                                 |
| Long Term Temperature Resistance   | 170°F (77°C)                                                                         |
| Minimum Long Term Temp. Resistance | 40°F (4°C)                                                                           |
| Length                             | 36 yards                                                                             |
| Colors                             | Black, Blue, Clear, Green, Orange, Red, White, Yellow, Gray Brown, Purple, OSHA Blue |

To achieve ultimate adhesion, the bonding surface should be clean, dry, and free of dirt and oils. The strength of the adhesive bond is dependent on the amount of surface area directly in contact with the adhesive. Firm pressure is recommended to achieve good adhesive to surface contact.

UltraTape recommends that each user conduct their own test to determine the product's suitability for the intended application and shall assume all risks and liabilities in connection therewith. Materials should be stored at 70°F (21C°) with 50% relative humidity.