

Tiger-Vac



Empfohlene Reinraumklassen

ISO 4 | 5 | 6 | 7 | 8 | 9

GMP C | D



Staubsauger #EMI-CWR (Spezial- Dichtungsmittel: silikonfrei)

pure¹¹-Nr.: 1131303, Marke: Tiger-Vac

Eigenschaften

- Marke: Tiger-Vac
- Art Staubsauger: Trockensauger
- Antistatisch
- ESD-Eigenschaften
- Tuchfilter
- HEPA-Filter
- ULPA-Filter
- Filtrationssystem: 4-stufig
- Stromspannung: 240 V
- Stromstärke in A: 4,6 A
- Gewicht in kg: 16 kg
- Alleinstellungsmerkmal: EMI/RFI-geschirmt
- Behälterkapazität in L (trocken): 15,1 L
- Breite in cm: 43 cm
- Filterbeutelkapazität in L: 9,5 L
- Geräuschentwicklung in dB(A): 70 dB(A)
- Höhe in cm: 71 cm
- Länge in cm: 38 cm
- Leistung in Watt: 1.000 W

- Luftstrom in m³/h: 204 m³/h
- Material Gehäuse: verchromter Stahl
- Motor: Einphasiger Durchfluss-Motor
- Netzkabel Länge in cm: 1.006 cm
- Netzkabel Typ: European Plug

Material

-

Verpackung

- STK

Produktvarianten

pure¹¹-Nr.: 1131303, Staubsauger #EMI-CWR (Spezial-Dichtungsmittel: silikonfrei)


Trockensauger / VE: STK



Applicable Requirements :
ANSI/UL 1017
CSA C22.2 No.243



Characteristics

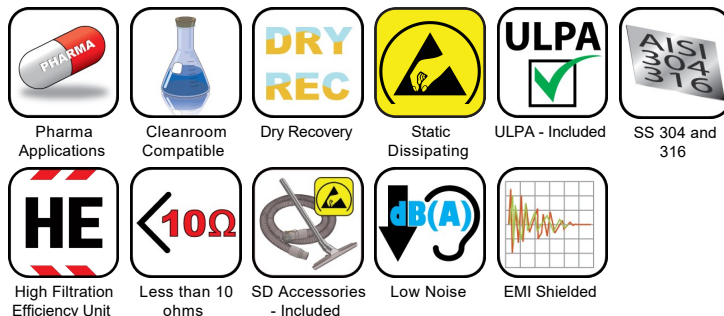

- ULPA filter with an efficiency of 99.999% at 0.12 micron. Filtration efficiency of 99.9995% at 0.18 micron. Tested IEST-RP-CC001. U15 by MPPS method as per EN 1822. All of our ULPA vacuum systems are aerosol leak tested before leaving our facility - included
- Cleanroom compatible with ISO Class 4 (former Class 10). Can be used in the Pharmaceutical industry
- Static free and ESD safe
- EMI/RFI Shielded
- TELECOM package available
- 4-stage filtration system includes an ULPA Filter (U15), double cloth filter, and disposable filter bags. An internal OSHA compliant HEPA filter (H14) is available as a 5th stage of filtration
- Designed for use in contamination controlled environments
- Powerful dual speed Thru-Flow motor
- For dry recovery only
- Made entirely of chrome-polished steel
- Mounted on a 4-wheel dolly for easy maneuverability
- Includes a complete tool kit.

Specifications

EMI-CWR	110110A
Model Name	EMI-CWR
Type	Electric
Tension	120 V
Frequency	60 Hz
Phase	Single
Wattage	1000 W
Power	1.3 HP
Amperage	8.5 A
Air Flow	120 CFM
Vacuum Pressure	95 " H ₂ O
Sound Level	70 dB(A)
Type of Power Outlet	120V
Suction Inlet Port	1.5 "
Cart Type	4 Wheel Dolly (4W)
Filter Cleaning	None
Dust Recovery Tank	4 Gal
Dry Recovery - Disposable Filter Bag	2.5 gal.
Length	15 "
Width	17 "
Height	28 "
Weight (Vacuum Only)	35 lb.
Cord Length	35 ft.

Please note that specifications are subject to change without notice


Use only recommended tools & accessories



Tools and Accessories for EMI-CWR - Included



#211028 Paper Filter Recovery Bags for model EMI-CWR
(Package of 5) - Included



EMI SUPPRESSION / RFI SHIELDING



ULPA Filter - Included



Stainless steel holding bracket - Optional