


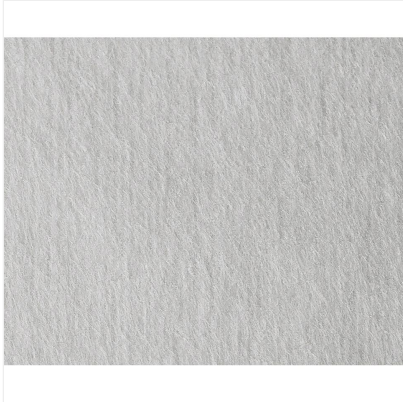

Tuch Amplitude Delta

pure¹¹-Nr.: 06058, Hersteller: CONTEC

Zusammenfassung

- Neue pure¹¹-Artikelnummer (ab 01.07.2023): 1106058
- Material: Polyester
- Gewicht: 71 g/m²
- Vliesstoff aus 100% Polyester (Nonwoven), hydroverfestigt
- Sehr weiches Vlies
- Besonders geeignet für kratzempfindliche Flächen und als Optik-Tuch
- Keine Tenside
- Hohe Absorptionskraft im Vergleich zum Gewicht des Tuches
- Lieferform: gelegt

Empfohlene Reinraumklassen

ISO	3	4	5	6	7	8	9
GMP					C	D	

Produktvarianten

pure¹¹-Nr.: 060581010

Farbe: Weiß / Maße: 10 x 10 cm (4 x 4") / Herst.-Nr.: AMDE0003 / VE: 1.200 Stück

pure¹¹-Nr.: 060581515

Farbe: Weiß / Maße: 15 x 15 cm (6 x 6") / Herst.-Nr.: AMDE0004 / VE: 300 Stück

pure¹¹-Nr.: 060582323

Farbe: Weiß / Maße: 23 x 23 cm (9 x 9") / Herst.-Nr.: AMDE0001 / VE: 300 Stück

pure¹¹-Nr.: 060583131


Farbe: Weiß / Maße: 31 x 31 cm (12 x 12") / Herst.-Nr.: AMDE0002 / VE: 2.400 Stück

Quelle: <https://www.pure11.de/tuch-amplitude-delta>



Amplitude[™] Delta[™] Wipes

Amplitude[™] Delta[™] is made of 100% nonwoven polyester wipes manufactured using the spunlacing process with no binders or additives. A cost effective polyester wipe with excellent cleanliness levels. Its open structure makes it highly sorbent. It is a very soft wipe with both good wet and dry strength. 100% polyester has good chemical resistance and compatibility with most solvents and disinfectants.

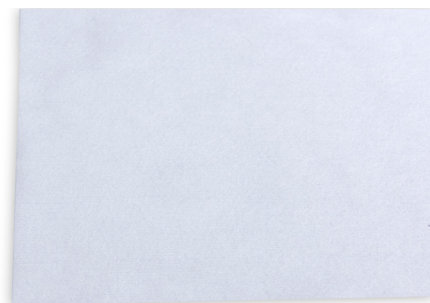


Features	Benefits
Open fiber structure	Provides excellent sorptive capacity
Durable nonwoven polyester	Soft and durable wipe when dry or wet
100% polyester	Compatible with a wide range of solvents and disinfectants including hypochlorites

Part No.	Description	Packaging
AMDE0003	Amplitude Delta Wipes, 4" x 4" (10x10cm), Flat stacked	1200/bag; 12 bags/case
AMDE0004	Amplitude Delta Wipes, 6" x 6" (15x15cm), Flat stacked	300/bag; 15 bags/case
AMDE0001	Amplitude Delta Wipes, 9" x 9" (23x23cm), Flat stacked	300/bag; 12 bags/case
AMDE0002	Amplitude Delta Wipes, 12" x 12" (30.5x30.5cm), Flat stacked	150/bag; 16 bags/case

Product Information

Material	100% polyester
Construction	Hydroentangled
Packaging Materials	Outer bags (OB1, OB2), low density polyethylene (LDPE)  Case (CS), corrugated fiberboard (PAP) 
Environment	ISO 5-8 Grade C/D

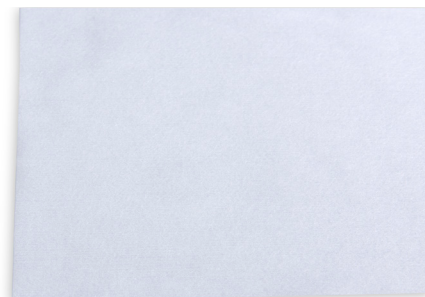

Technical Data

Attribute (units)	Typical Value	Test Method
Basis weight; nominal (g/m ²)	71	Contec Method
Sorbent capacity; (mL/m ²)	286	IEST-RP-CC004.3, Sec. 8.1
Sorptive rate; (seconds)	1.0	
Non-volatile residue, NVR		IEST-RP-CC004.3, Sec. 7.1.2
In deionized water; (g/m ²)	0.001	
In isopropanol; (g/m ²)	0.001	
Specific ions		IEST-RP-CC004.3, Sec. 7.2.2
Sodium; (ppm)	5.2	
Chloride; (ppm)	5.7	
Particles, readily releasable		IEST-RP-CC004.2, Sec. 5.1
P ≥ 0.5µm; (x10 ⁶ /m ²)	4.2	
Fibers > 100µm; (x10 ³ /m ²)	6.5	

Packaging

	EA/OB1	OB1/OB2	OB2/CS	EA/CS
AMDE0003	1200	1	12	14,400
AMDE0004	300	1	15	4,500
AMDE0001	300	1	12	3,600
AMDE0002	150	1	16	2,400

EA = Each, OB1 = Outer Bag 1, OB2 = Outer Bag 2, CS = Case

Recycle Symbol Key

PET	
HDPE	
LDPE	
PP	
PAP	

Notes

- a) The data shown are typical values and should not be used as product specifications.
- b) Valid product comparisons may only be obtained through side-by-side testing in the same test facility, under similar conditions.
- c) Current and/or comparison data may be available. Please contact a Contec sales representative for details.

Test Methods:

- 1) CTM Contec Test Method
- 2) IEST-RP-CC004.3 Evaluating Wiping Materials Used in Cleanroom and Other Controlled Environments, Institute of environmental Sciences and Technology, Rolling Meadows IL.