Tiger-Vac

Staubsauger #CR-4D

pure[11]-Nr.: 1111003, Marke: Tiger-Vac

Eigenschaften

- Marke: Tiger-Vac
- Art Staubsauger: Trockensauger
- HEPA-Filter
- ULPA-Filter
- Filtrationssystem: 4-stufig
- Filterbeutel
- Stromspannung: 240 V
- Stromstärke in A: 4,6 A
- Gewicht in kg: 15 kg
- Alleinstellungsmerkmal: EMI/RFI-geschirmt
- Behälterkapazität in L (trocken): 15,1 L
- Breite in cm: 43 cm
- Filterbeutelkapazität in L: 9,5 L
- Höhe in cm: 68,5 cm
- Länge in cm: 38 cm
- Leistung in Watt: 1.000 W
- Luftstrom in m³/h: 204 m³/h
- Material Gehäuse: verchromter Stahl / Polyethylen-Tank
- Motor: Einphasiger Durchfluss-Motor

Empfohlene Reinraumklassen

ISO 4 | 5 | 6 | 7 | 8 | 9

GMP C | D

we care

- Netzkabel Länge in cm: 1.006 cm
- Netzkabel Typ: European Plug

Material

-

Verpackung

- STK

Produktvarianten

pure¹¹-Nr.: 1111003, Staubsauger #CR-4D

Trockensauger / VE: STK

Tiger-Vac®
...The name to vacuum with

CR-4D
Pharma - Dry Recovery Only

Characteristics

- ULPA filter with an efficiency of 99.999% at 0.12 micron. Filtration efficiency of 99.9995% at 0.18 micron. Tested IEST-RP-CC001. U15 by MPPS method as per EN 1822. All of our ULPA vacuum systems are aerosol leak tested before leaving our facility - included
- Cleanroom compatible with ISO Class 4 (former Class 10). Can be used in the Pharmaceutical industry
- EMI/RFI Shielded
- 4-stage filtration system includes an ULPA Filter (U15), double cloth filter, and disposable filter bags. An internal OSHA compliant HEPA filter (H14) is available as a 5th stage of filtration
- Designed for use in contamination controlled environments
- Thru-Flow heavy duty motor
- For dry recovery only
- Polyethylene recovery tank with chrome plated motor head
- Mounted on a 4-wheel dolly for easy maneuverability
- Includes a complete tool kit.

Tiger-Vac Europa S.R.L.
Via Marie Curie 17
Zona Industriale Ponte Rizzoli
Ozzano Emilia, BO 40064

Tiger-Vac International Inc.
2020 Dagenais Blvd. Ouest
Laval, Quebec
Canada H7L 5W2

Tel: ((39) 051 79.53.52)
Fax: ((39) 051 4695077)

Website: http://www.tiger-vac.eu
Email: info@tiger-vac.it

Specifications

CR-4D	110135B	110135C	110135D	110135E	110136B	110136C
Model Name	CR-4D WITHOUT EMI FILTER	CR-4D WITHOUT EMI FILTER	CR-4D WITHOUT EMI FILTER	CR-4D WITHOUT EMI FILTER	CR-4D WITH EMI FILTER	CR-4D WITH EMI FILTER
Type (Powerhead)	Electric	Electric	Electric	Electric	Electric	Electric
Tension	240 V	240 V	240 V	240 V	240 V	240 V
Frequency	50 Hz	50 Hz	50 Hz	50 Hz	50 Hz	50 Hz
Phase	Single	Single	Single	Single	Single	Single
Wattage	1000 W	1000 W	1000 W	1000 W	1000 W	1000 W
Power	1 kW	1 kW	1 kW	1 kW	1 kW	1 kW
Amperage	4.6 A	4.6 A	4.6 A	4.6 A	4.6 A	4.6 A
Air Flow	204 m^3/h	204 m^3/h	204 m^3/h	204 m^3/h	204 m^3/h	204 m^3/h
Vacuum Pressure	2410 mm H_20	2410 mm H_20	2410 mm H_20	2410 mm H_20	2410 mm H_20	2410 mm H_20
Type of Power Outlet	European	UK	Swiss	Chinese	European	UK
Suction Inlet	38 mm	38 mm	38 mm	38 mm	38 mm	38 mm
Cart Type	4 Wheel Dolly (4W)	4 Wheel Dolly (4W)	4 Wheel Dolly (4W)	4 Wheel Dolly (4W)	4 Wheel Dolly (4W)	4 Wheel Dolly (4W)
Filter Cleaning	None	None	None	None	None	None
Dust Recovery Tank	15.1 L	15.1 L	15.1 L	15.1 L	15.1 L	15.1 L
Dry Recovery - Disposable Filter Bag	9.5 L	9.5 L	9.5 L	9.5 L	9.5 L	9.5 L
Length	43 cm	43 cm	43 cm	43 cm	38 cm	38 cm
Width	38 cm	38 cm	38 cm	38 cm	38 cm	38 cm
Height	71 cm	71 cm	71 cm	71 cm	76 cm	76 cm
Weight (Vacuum Only)	14.5 kg.	14.5 kg.	14.5 kg.	14.5 kg.	15 kg.	15 kg.
Cord Length	10.6 m	10.6 m	10.6 m	10.6 m	10.6 m	10.6 m

CR-4D	110136D	110136E
Model Name	CR-4D WITH EMI FILTER	CR-4D WITH EMI FILTER
Type (Powerhead)	Electric	Electric
Tension	240 V	240 V
Frequency	50 Hz	50 Hz
Phase	Single	Single
Wattage	1000 W	1000 W
Power	1 kW	1 kW
Amperage	4.6 A	4.6 A
Air Flow	204 m^3/h	204 m^3/h
Vacuum Pressure	2410 mm H_20	2410 mm H_20
Type of Power Outlet	Swiss	Chinese
Suction Inlet	38 mm	38 mm

Cart Type	4 Wheel Dolly (4W)	4 Wheel Dolly (4W)
Filter Cleaning	None	None
Dust Recovery Tank	15.1 L	15.1 L
Dry Recovery - Disposable Filter Bag	9.5 L	9.5 L
Length	38 cm	38 cm
Width	38 cm	38 cm
Height	76 cm	76 cm
Weight (Vacuum Only)	15 kg.	15 kg.
Cord Length	10.6 m	10.6 m

Please note that specifications are subject to change without notice

Use only recommended tools & accessories

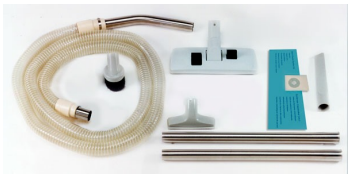

CR-4D Tools and Accessories with Disposable Filter Bag - Included

ULPA Filter - Included

HEPA Filter - Optional

Stainless steel holding bracket - Optional

Tiger-Vac Europa S.R.L.
Via Marie Curie 17
Zona Industriale Ponte Rizzoli
Ozzano Emilia, BO 40064

Tiger-Vac International Inc.
2020 Dagenais Blvd. Ouest
Laval, Quebec
Canada H7L 5W2

Tel: ((39) 051 79.53.52)
Fax: ((39) 051 4695077)

Website: http://www.tiger-vac.eu
Email: info@tiger-vac.it

European Headquarters

Tiger-Vac Europa S.R.L.
Via Marie Curie 17
Zona Industriale Ponte Rizzoli
Ozzano Emilia, BO 40064

Tel: ((39) 051 79.53.52)
Fax: ((39) 051 4695077)
Website: http://www.tiger-vac.eu
Email: info@tiger-vac.it

International Headquarters

Tiger-Vac International Inc.
2020 Dagenais Blvd. Ouest
Laval, Quebec
Canada H7L 5W2

Tel: (450-625-0099)
Fax: (450-625-3388)
Website: http://www.tiger-vac.com
Email: sales@tiger-vac.com

Cleanroom Compatible

Pharma Applications

ULPA - Included

Dry Recovery

High Filtration Efficiency Unit

Accessories Included


EMI Shielded

Specifications For CR-4D

Name	Part Number	Tension	Frequency	Phase	Wattage	Power	Amperage	Air Flow	Vacuum Pressure	Type of Power Outlet	Dust Recovery Tank	Dry Recovery - Disposable Filter Bag
CR-4D WITHOUT EMI FILTER	**110135B**	240 V	50 Hz	Single	1000 W	1 kW	4.6 A	204 m^3/h	2410 mm H_20	European	15.1 L	9.5 L
	Dimensions: H71 cm x W38 cm x L43 cm Weight: 14.5 kg.											
CR-4D WITHOUT EMI FILTER	**110135C**	240 V	50 Hz	Single	1000 W	1 kW	4.6 A	204 m^3/h	2410 mm H_20	UK	15.1 L	9.5 L
	Dimensions: H71 cm x W38 cm x L43 cm Weight: 14.5 kg.											
CR-4D WITHOUT EMI FILTER	**110135D**	240 V	50 Hz	Single	1000 W	1 kW	4.6 A	204 m^3/h	2410 mm H_20	Swiss	15.1 L	9.5 L
	Dimensions: H71 cm x W38 cm x L43 cm Weight: 14.5 kg.											
CR-4D WITHOUT EMI FILTER	**110135E**	240 V	50 Hz	Single	1000 W	1 kW	4.6 A	204 m^3/h	2410 mm H_20	Chinese	15.1 L	9.5 L
	Dimensions: H71 cm x W38 cm x L43 cm Weight: 14.5 kg.											
CR-4D WITH EMI FILTER	**110136B**	240 V	50 Hz	Single	1000 W	1 kW	4.6 A	204 m^3/h	2410 mm H_20	European	15.1 L	9.5 L
	Dimensions: H76 cm x W38 cm x L38 cm Weight: 15 kg.											
CR-4D WITH EMI FILTER	**110136C**	240 V	50 Hz	Single	1000 W	1 kW	4.6 A	204 m^3/h	2410 mm H_20	UK	15.1 L	9.5 L
	Dimensions: H76 cm x W38 cm x L38 cm Weight: 15 kg.											
CR-4D WITH EMI FILTER	**110136D**	240 V	50 Hz	Single	1000 W	1 kW	4.6 A	204 m^3/h	2410 mm H_20	Swiss	15.1 L	9.5 L
	Dimensions: H76 cm x W38 cm x L38 cm Weight: 15 kg.											
CR-4D WITH EMI FILTER	**110136E**	240 V	50 Hz	Single	1000 W	1 kW	4.6 A	204 m^3/h	2410 mm H_20	Chinese	15.1 L	9.5 L
	Dimensions: H76 cm x W38 cm x L38 cm Weight: 15 kg.											

Please note that specifications are subject to change without notice

Technical Sheet For CR-4D

ULPA FILTER AND ACCESSORIES - Included

Part #	Description
211027	ULPA FILTER (U15)

HEPA FILTER - INTERNAL - 5th STAGE OF FILTRATION - Optional	
Part #	**Description**
211027B	HEPA FILTER 99.995% EFFICIENCY ON 0.3 MICRON (CE VERSION)

FILTERS AND ACCESSORIES - Included	
Part #	**Description**
211226	DOUBLE CLOTH FILTER ASSEMBLY

DISPOSABLE FILTER BAGS - Included	
Part #	**Description**
211028	PAPER FILTER BAG (PACKAGE OF 5)

DISPOSABLE FILTER BAGS - Optional	
Part #	**Description**
211069	PAPER FILTER BAG (PACKAGE OF 12)

TOOLS AND ACCESSORIES - Included	
Part #	**Description**
323301B	SUCTION HOSE ASSEMBLY 10'(3m) SD* WITH CHROME ENDS FOR CR-4D
323315	EXTENSION WANDS, 1.25" (32mm) SET OF 2, CHROME WITH HOLE FOR BUTTON LOCK
323313	CREVICE TOOL, 1.25"(32mm) x 9"(23cm), BEIG, PVC
323314	UPHOLSTERY FLAT TOOL, Ø1.25"(32mm), PVC
323312	ROUND BRUSH, Ø1.25"(32mm)
323311	COMBI TOOL, 1.25"(32mm) x 10.5" (27cm), BEIGE, WITH HOLE FOR BUTTON LOCK

TOOLS AND ACCESSORIES - Optional	
Part #	**Description**
323317	UTILITY FLOOR TOOL WITH WHEELS & WITH SQUEEGEE BLADES 1.25"(32mm) x 12"(30cm), BEIGE PLASTIC
323321	ROUND TOOL, WITH RUBBER BLADES, Ø1.25"(32mm)
323316	MICRO TOOL KIT, Ø1.25"(32mm), ESD* SAFE PLASTIC

STAINLESS STEEL HOLDING BRACKET - Optional	
Part #	**Description**
219098A	CABLE & HOSE HOLDING BRACKET ASSEMBLY, STAINLESS STEEL FOR 32mm TUBES
219098B	CABLE & HOSE HOLDING BRACKET ASSEMBLY, STAINLESS STEEL, FOR 38mm TUBES

INTERCEPTOR ATTACHMENT FOR LIQUID RECOVERY - Optional	
Part #	**Description**
211024	INTERCEPTOR FOR CLEANROOM USE WITH ACCESSORIES