

Tiger-Vac



Staubsauger CWR-15 (4W) #110497B

pure¹¹-Nr.: 1130264, Marke: Tiger-Vac

Eigenschaften

- Marke: Tiger-Vac
- Art Staubsauger: Naß-/Trockensauger
- Antistatisch
- ESD-Eigenschaften
- Tuchfilter
- ULPA-Filter
- DUAL-ULPAFilter
- Filtrationssystem: 5-stufig
- Filterbeutel
- Stromspannung: 240 V
- Stromstärke in A: 5 A
- Gewicht in kg: 31 kg
- Alleinstellungsmerkmal: EMI/RFI-geschirmt
- Autoklavierbar
- Behälterkapazität in L (nass): 47,3 L
- Behälterkapazität in L (trocken): 19 L
- Breite in cm: 46 cm
- Filterbeutelkapazität in L: 19 L
- Geräuscentwicklung in dB(A): 75 dB(A)

Empfohlene

Reinraumklassen

ISO 4 | 5 | 6 | 7 | 8 | 9

GMP A/B | C | D



- Höhe in cm: 100 cm
- Länge des Schlauches in cm: 300 cm
- Länge in cm: 61 cm
- Leistung in Watt: 1.050 W
- Luftstrom in m³/h: 189 m³/h
- Material Gehäuse: Edelstahl
- Motor: Einphasiger Bypass-Motor
- Netzkabel Länge in cm: 1,06 cm
- Netzkabel Typ: European Plug

Material

-

Verpackung


- STK

Produktvarianten


pure¹¹-Nr.: 1130264, Staubsauger CWR-15 (4W) #110497B

Naß-/Trockensauger / VE: STK

CLEANROOM VACUUM CLEANERS FOR WET & DRY RECOVERY

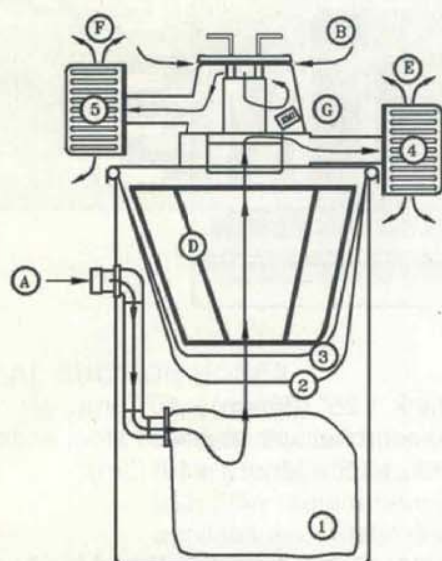

Dry Recovery

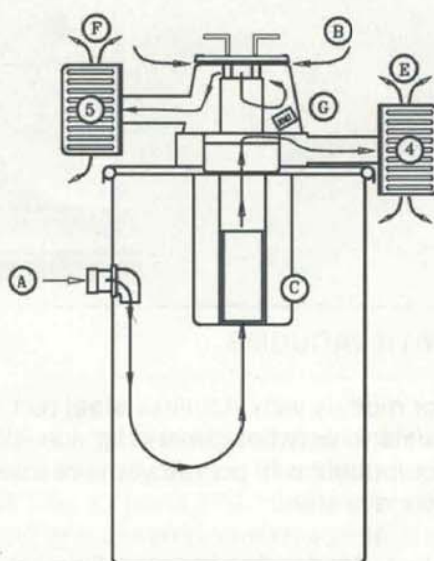

Liquid Recovery

WET & DRY CLEANROOM VACUUM CLEANERS

- A Suction intake
- B Motor cooling air intake
- C Autoclavable floater system: cuts-off suction when recovered liquids reach capacity
- D Stainless steel support cage for cloth filter
- E Clean air exhaust #1 - for working air
- F Clean air exhaust #2 - for motor cooling air
- G EMI electronic filter suppressor
- H Middle Ring: Allows a variety of carbon filters to be used with the wet & dry cleanroom vacuums. (For use with models CWR-10 and CWR-15)

FILTRATION SYSTEM

1. PAPER FILTER BAG WITH MICRO LINER (one micron efficiency) collects the bulk of recovered materials and keeps other filters free from clogging dust. For dry recovery only.
2. DOUBLE CLOTH FILTER (consisting of two layers): DRALON PRE-FILTER prevents caking of fine dust
3. POLYESTER MAIN FILTER (one micron efficiency) prolongs the life of the Ulpa filters.
4. DUAL ULPA (Ultra Low Penetration Air) FILTERS:
 ULPA FILTER for working air with 99.999% efficiency on 0.12 micron. Collects ultra-fine particles that have entered the vacuum system through the suction intake and also filters any contamination generated by the motor fans to ensure clean room compatibility.
5. ULPA FILTER for cooling air with 99.999% efficiency on 0.12 microns. Collects ultra-fine residue generated by the vacuum motor (from carbon brushes, bearings, etc) to ensure clean room Compatibility.

European Headquarters

Tiger-Vac Europa S.R.L.
Via Marie Curie 17
Zona Industriale Ponte Rizzoli
Ozzano Emilia, BO 40064

Tel: ((39) 051 79.53.52)
Fax: ((39) 051 4695077)
Website: <http://www.tiger-vac.eu>
Email: info@tiger-vac.it

International Headquarters

Tiger-Vac International Inc.
2020 Dagenais Blvd. Ouest
Laval, Quebec
Canada H7L 5W2

Tel: (450-625-0099)
Fax: (450-625-3388)
Website: <http://www.tiger-vac.com>
Email: sales@tiger-vac.com



EMI Shielded

Specifiche per CWR-10/CWR-15 (4W)

Name	Teil Nummer	Spannung	Frequenz	Phase	Leistung	Leistung	Stromstärke	Luftstrom	Saugdruck	Typ des Leistungsausgangs	Fassungsvermögen des tanks (trocken)	fassungsvermögen des Sammelbeutels (trocken)
CWR-10 (4W)	110495B	240 V	50 Hz	Single	1050 W	1 kW	5 A	189 m³/h	2180 mm H ₂ O	European	28.4 L	19 L
	Abmessungen: H64 cm x W46 cm x L61 cm Gewicht: 30 kg. Geräuschpegel: 75 dB(A)											
Description: With Euro Plug												
CWR-10 (4W)	110495C	240 V	50 Hz	Single	1050 W	1 kW	5 A	189 m³/h	2180 mm H ₂ O	UK	28.4 L	19 L
	Abmessungen: H64 cm x W46 cm x L61 cm Gewicht: 30 kg. Geräuschpegel: 75 dB(A)											
Description: With UK Plug												
CWR-10 (4W)	110495E	240 V	50 Hz	Single	1050 W	1 kW	5 A	189 m³/h	2180 mm H ₂ O	Chinese	28.4 L	19 L
	Abmessungen: H64 cm x W46 cm x L61 cm Gewicht: 30 kg. Geräuschpegel: 75 dB(A)											
Description: With China Plug												
CWR-15 (4W)	110497B	240 V	50 Hz	Single	1050 W	1 kW	5 A	189 m³/h	2180 mm H ₂ O	European	47.3 L	19 L
	Abmessungen: H100 cm x W46 cm x L61 cm Gewicht: 31 kg. Geräuschpegel: 75 dB(A)											
Description: With Euro Plug												
CWR-15 (4W)	110497C	240 V	50 Hz	Single	1050 W	1 kW	5 A	189 m³/h	2180 mm H ₂ O	UK	47.3 L	19 L
	Abmessungen: H100 cm x W46 cm x L61 cm Gewicht: 31 kg. Geräuschpegel: 75 dB(A)											
Description: With UK Plug												
CWR-15 (4W)	110497E	240 V	50 Hz	Single	1050 W	1 kW	5 A	189 m³/h	2180 mm H ₂ O	Chinese	47.3 L	19 L
	Abmessungen: H100 cm x W46 cm x L61 cm Gewicht: 31 kg. Geräuschpegel: 75 dB(A)											
Description: With China Plug												

Bitte beachten Sie, dass die Spezifikationen ohne vorherige Ankündigung geändert werden können

Dati tecnici per CWR-10/CWR-15 (4W)

ULPA-FILTER UND ZUBEHÖR - Included	
Artikelnummer	Beschreibung
211027	ULPA FILTER (U15)

FILTER UND ZUBEHÖR - Included	
Artikelnummer	Beschreibung

211305A	DOUBLE CLOTH FILTER ASSEMBLY WITH LACES FOR STAINLESS STEEL FILTER CAGE (CAGE SOLD SEPARATELY)
212734A	STAINLESS STEEL CAGE FOR CLOTH FILTER -ELECTROPOLISHED

EINWEG-FILTERBEUTEL FÜR MODELL CWR-10 (4W) - Included	
Artikelnummer	Beschreibung
218063-5	SYNTHETIC RECOVERY BAGS, 10" x 28", 50mm COLLAR (PACKAGE OF 5))
211840	PVC PIPE CONNECTOR FOR PAPER FILTER BAG -STAINLESS STEEL TANK

EINWEG-FILTERBEUTEL FÜR MODELL CWR-15 (4W) - Included	
Artikelnummer	Beschreibung
218063-5	SYNTHETIC RECOVERY BAGS, 10" x 28", 50mm COLLAR (PACKAGE OF 5))
211841	PVC PIPE CONNECTOR FOR PAPER FILTER BAG -STAINLESS STEEL TANK

ENTWÄSSERUNGSVENTILEINHEIT UND ZUBEHÖR - Included	
Artikelnummer	Beschreibung
381093	DRAIN HOSE ASSEMBLY 0.75"(19mm)x5'(1.5m)CLEAR HOSE WITH 0.75"(19mm) STAINLESS STEEL FEMALE CAMLOCK

WERKZEUGE UND ZUBEHÖR - Included	
Artikelnummer	Beschreibung
323403	CLEAR URETHANE HOSE ASMBLY 1.25"(32mm)x10'(3m), w/1.5" S/S FEMALE CAMLOCK, WITH S/S CURVED HANDLE
323330	EXTENSION WANDS, BOTH STRAIGHT, 1.25"(32mm) x 20.5"(52cm), STAINLESS STEEL (SET OF 2)
323311	COMBI TOOL, 1.25"(32mm) x 10.5" (27cm), BEIGE, WITH HOLE FOR BUTTON LOCK
323317	UTILITY FLOOR TOOL WITH WHEELS & WITH SQUEEGEE BLADES 1.25"(32mm) x 12"(30cm), BEIGE PLASTIC
323321	ROUND TOOL, WITH RUBBER BLADES, Ø1.25"(32mm)
323314	UPHOLSTERY FLAT TOOL, Ø1.25"(32mm), PVC
323313	CREVICE TOOL, 1.25"(32mm) x 9"(23cm), BEIG, PVC
211701	DEFOAMING LIQUID (BOTTLE) 909 ml(31 fl oz.)- FOR WET RECOVERY MODE ONLY
211065	GROUND CONTINUITY TESTER

WERKZEUGE UND ZUBEHÖR - Optional	
Artikelnummer	Beschreibung
323470	FOODGRADE HOSE ASSEMBLY 1.25"(32mm)x10'(3m) FOR CWR-XX (SMOOTH INSIDE & OUT)
323455	EPDM HOSE ASSEMBLY SD* AUTOCLAVABLE 1.25" x 10' (32mm x3m) w/1.5" s/S SWIVEL CAMLOCK & CURVED HANDLE
323412	FLOOR TOOL ASSEMBLY, AUTOCLAVABLE, 1.25"(32mm) x 12"(30cm), STAINLESS STEEL w/WHITE NITRILE BLADES
323413	CREVICE TOOL, AUTOCLAVABLE, Ø1.25"(32mm)x10"(25.4cm) -STAINLESS STEEL

NADELFÄNGER UND ZUBEHÖR - Optional	
Artikelnummer	Beschreibung
215500	NEEDLE TRAP ASSEMBLY, STAINLESS STEEL, 2"(50mm) INLET X 1.25"(32mm) OUTLET, ELECTROPOLISHED
500235M	TIGER-CLAW ONLY (TRANSPARENT FOODGRADE SILICONE) Ø2"(50mm)x4.5"(11.5cm)
500231M	CONICAL NOZZLE ONLY (TRANSPARENT FOODGRADE SILICONE) Ø2"(50mm)x7.5"(19cm)